


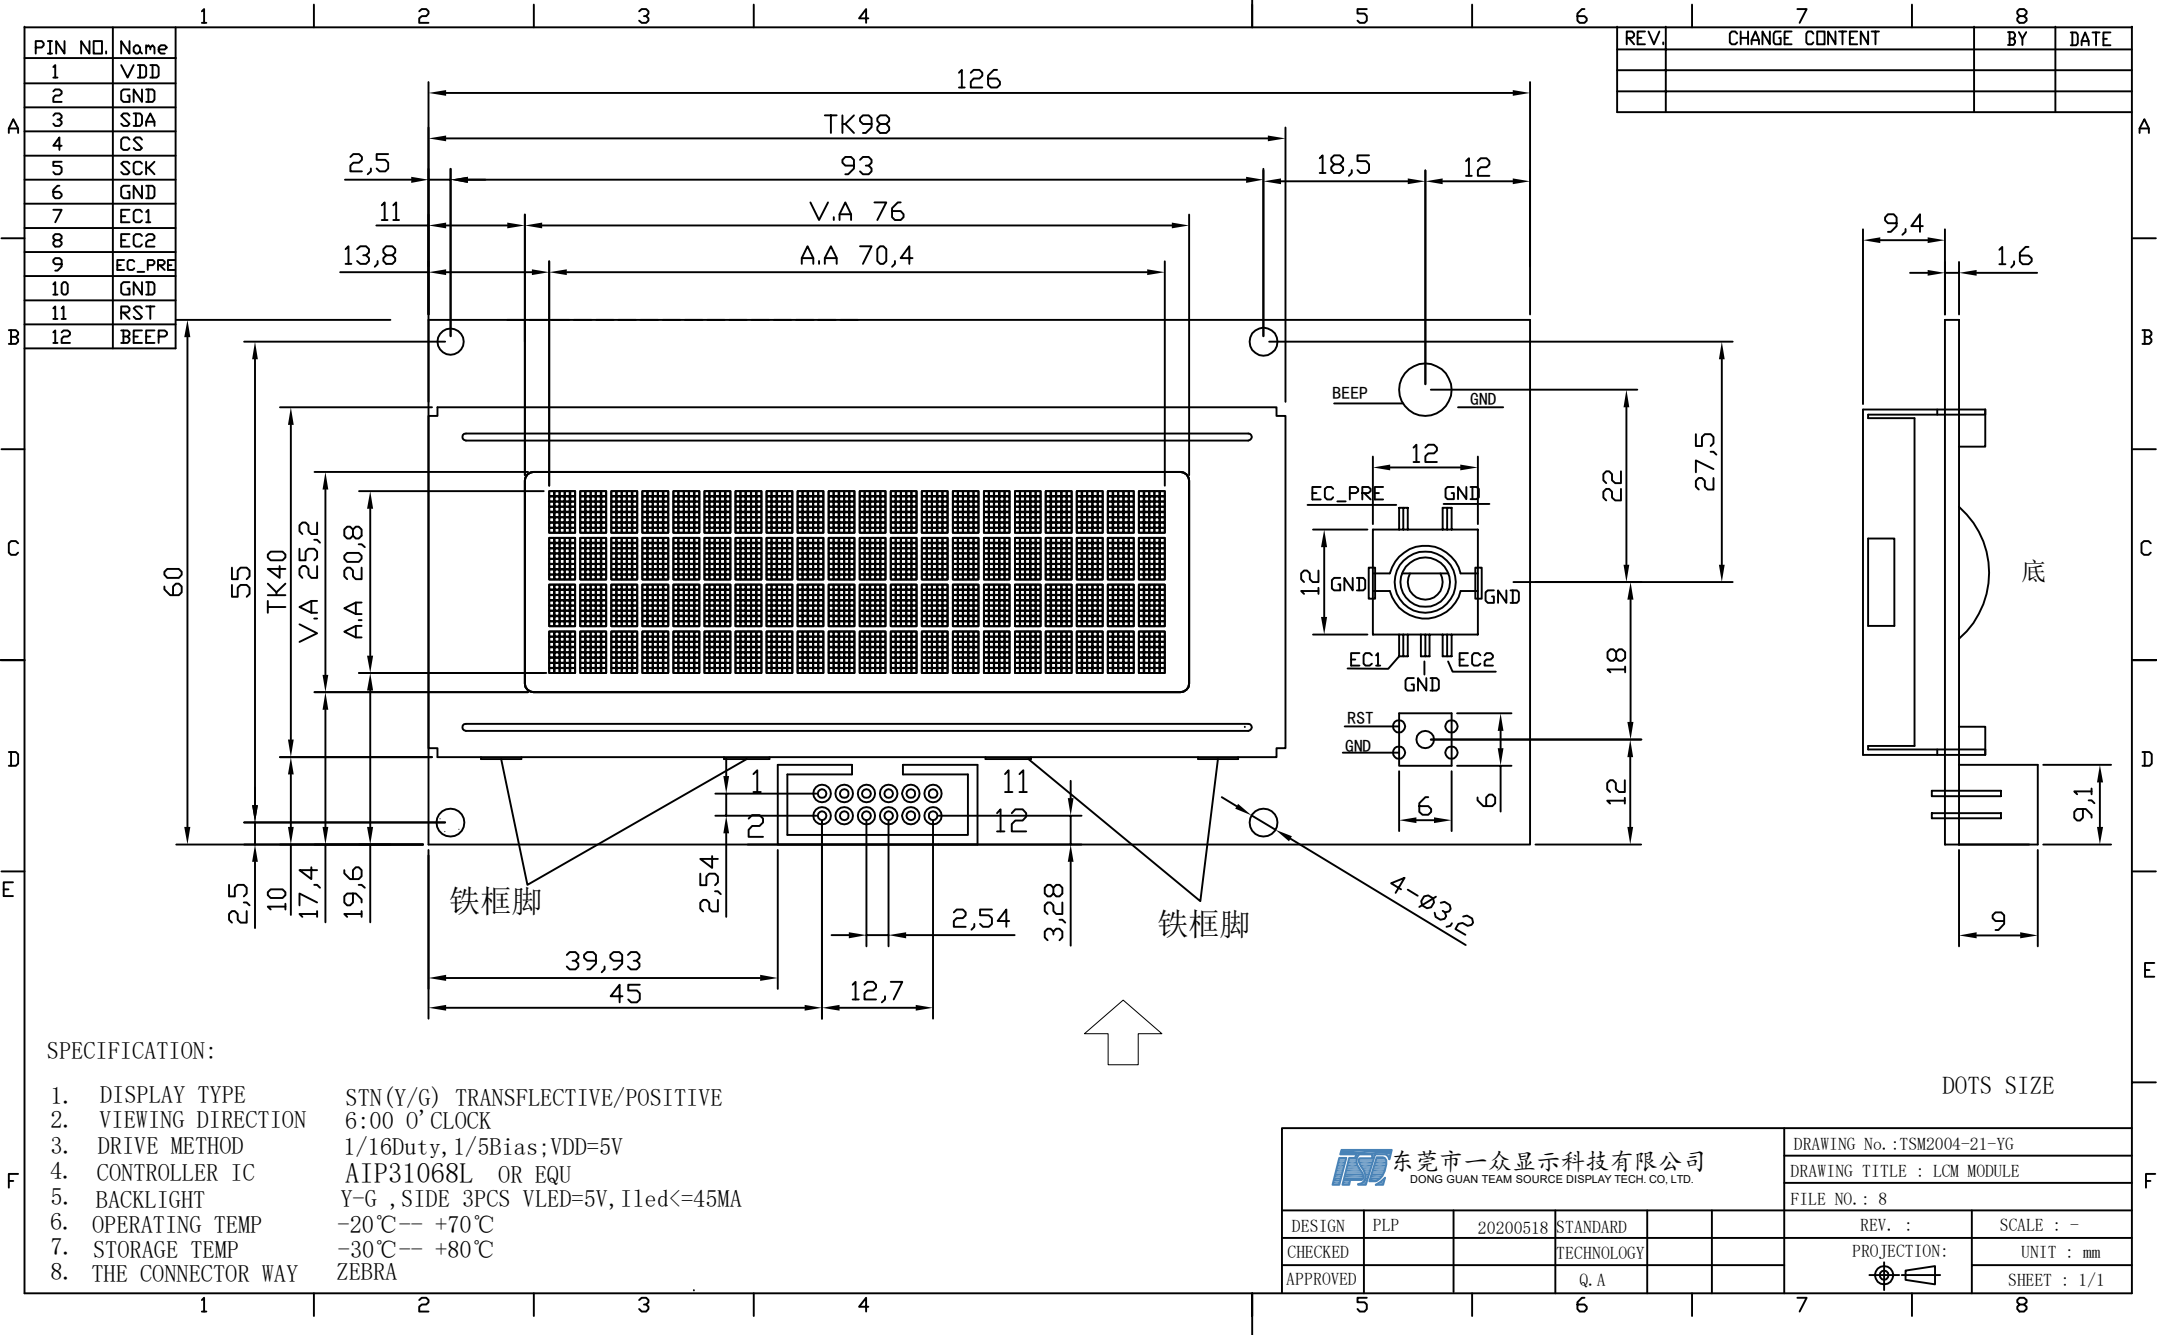

SPECIFICATION:

- | | |
|----------------------|------------------------------------|
| 1. DISPLAY TYPE | STN(Y/G) TRANSFLECTIVE/POSITIVE |
| 2. VIEWING DIRECTION | 6:00 O'CLOCK |
| 3. DRIVE METHOD | 1/16Duty, 1/5Bias; VDD=5V |
| 4. CONTROLLER IC | AIP31068L OR EQU |
| 5. BACKLIGHT | Y-G, SIDE 3PCS VLED=5V, Iled<=45MA |
| 6. OPERATING TEMP | -20℃-- +70℃ |
| 7. STORAGE TEMP | -30℃-- +80℃ |
| 8. THE CONNECTOR WAY | ZEBRA |

DOTS SIZE

 东莞市一众显示科技有限公司 DONG GUAN TEAM SOURCE DISPLAY TECH. CO., LTD.				DRAWING No. : TSM2004-21-YG	
				DRAWING TITLE : LCM MODULE	
				FILE NO. : 8	
DESIGN	PLP	20200518	STANDARD	REV. :	SCALE : -
CHECKED			TECHNOLOGY	PROJECTION:	UNIT : mm
APPROVED			Q. A		SHEET : 1/1