

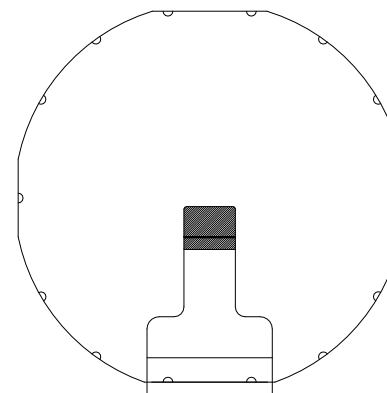
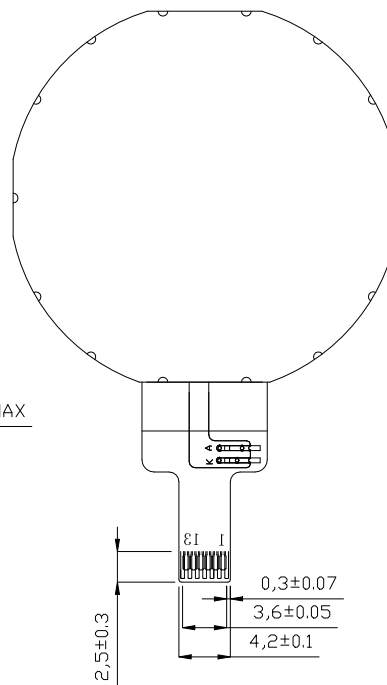
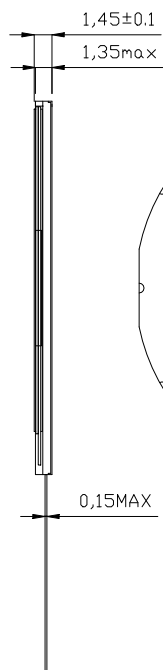


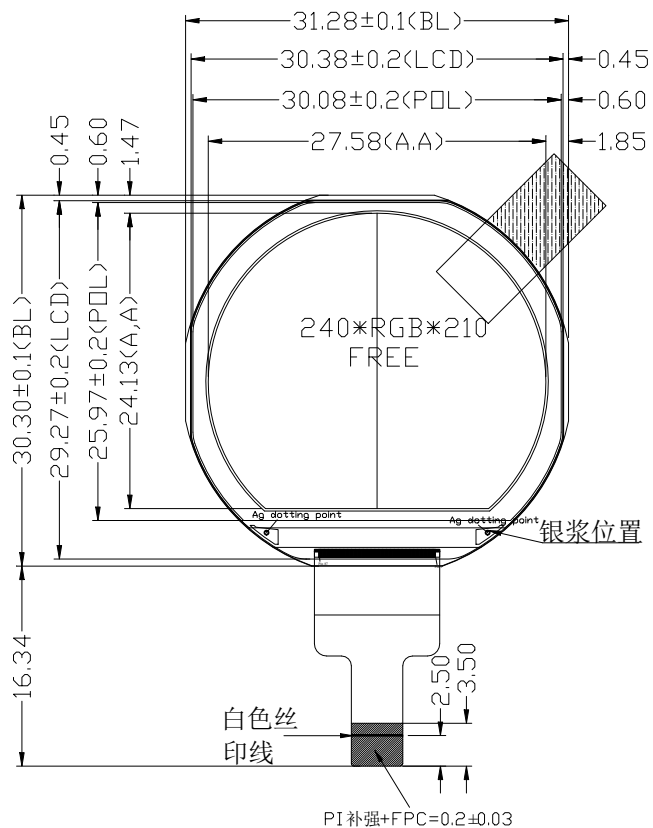

FPC弯折示意图
FPC展开出货

PIN	NAME
1	LEDK2
2	LEDK1
3	LEDA
4	GND
5	FMARK
6	SDA
7	RS
8	SCLK
9	CS
10	RESET
11	IDVCC
12	VCC
13	GND

SPI-4LINE



BACKLIGHT(CIRCUIT DIAGRAM)

VF=3.2V IF=40mA

NOTES:

1. GENERAL TOLERANCE: ± 0.2
2. () REFERENCE DIMENSION
3. Important dimension: ①~⑤

LCD Type	1.08" TFT, Transmissive
	Normally black
Resolution	240(RGB)*210
View Direction	All o'clock
LCD driver IC	ST7789V
Color depth	65K
Interface types	SPI
Operating voltage	2.5~3.3V
With TP/Lens	without
Backlight	2 LEDs, 40mA(typ), 3.2V(ref)
Surface luminance	400 cd/m ² (typ)
Operating temperature	-20°C~60°C
Storage temperature	-30°C~70°C
Color chromaticity	[white] x:0.297±0.03/y:0.332±0.03

版本 (Version)	变更记录 (Revise History)	日期 (Date)
A0	Initial release	2021.06.05

设计 (DESIGN)	Hcr
审核 (CHECKED)	Aron
批准 (APPROVED)	Aron
客户承认 (CUSTOMER APPROVAL)	

 一 众 显 示 TEAM SOURCE DISPLAY		
TITLE: LCM	页面 (Page) 单位 (Unit)	1 / 1 mm
Drawing No. TST108102	比例 (SCALE) 角度 (Angle)	1 : 1 