

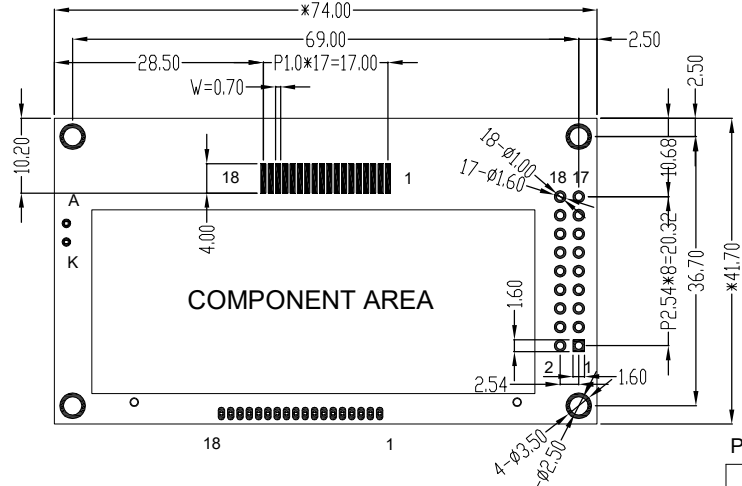
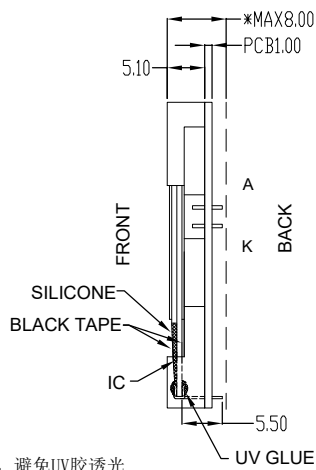
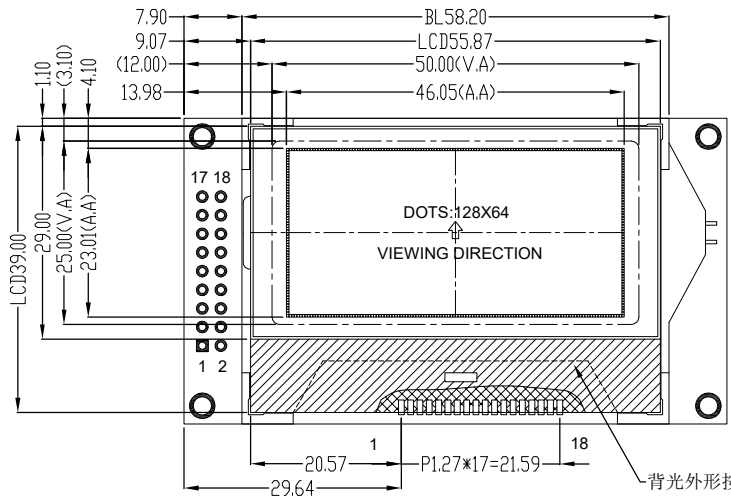

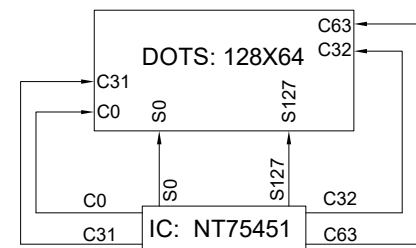


由 Autodesk 教育版 产品制作



PIN Definition	
1	VSS
2	VDD
3	C86
4	DB7
5	DB6
6	DB5
7	DB4
8	DB3
9	DB2
10	DB1
11	DB0
12	E
13	R/W
14	RS
15	RST
16	CS1
17	LED+
18	LED-



SPECIFICATION:			
Display Type	FSTN	Backlight	White Color ; Uniformity:70%(MIN)
	Positive		Luminance : 55cd/m2(MIN)
	Transflective		IF:15mA,VF:3.0±0.2V
Drive Method	1/65Duty	Customer' NO.	X:0.26~0.32;Y:0.26~0.32
	1/9Bias		/
Viewing Direction	6:00 O'clock		Top
Vop	10.0V	Tst	-40°C~+80°C
Vdd	3.0V	With***	Important Dimension
Drive IC	ST7567S	With(") "	Reference Dimension
Environmental protection requirements: RoHS 2.0 ☒ REACH ☐ Halogen-free ☐			

东莞市一众显示科技有限公司
DONG GUAN TEAM SOURCE DISPLAY TECH. CO, LTD.

Unspecified Tolerance: ±0.3	UNITS: mm	DATE:	PART NUMBER : TSG12864-1185-FFDLWS-R		SHEET: 1 Of 1
DESIGN BY:	CHECKED BY:				DRAWING DESCRIPTION: MODEL

DO NOT SCALE THIS DRAWING. PROJECTION