PIN	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LEDA
16	LEDK

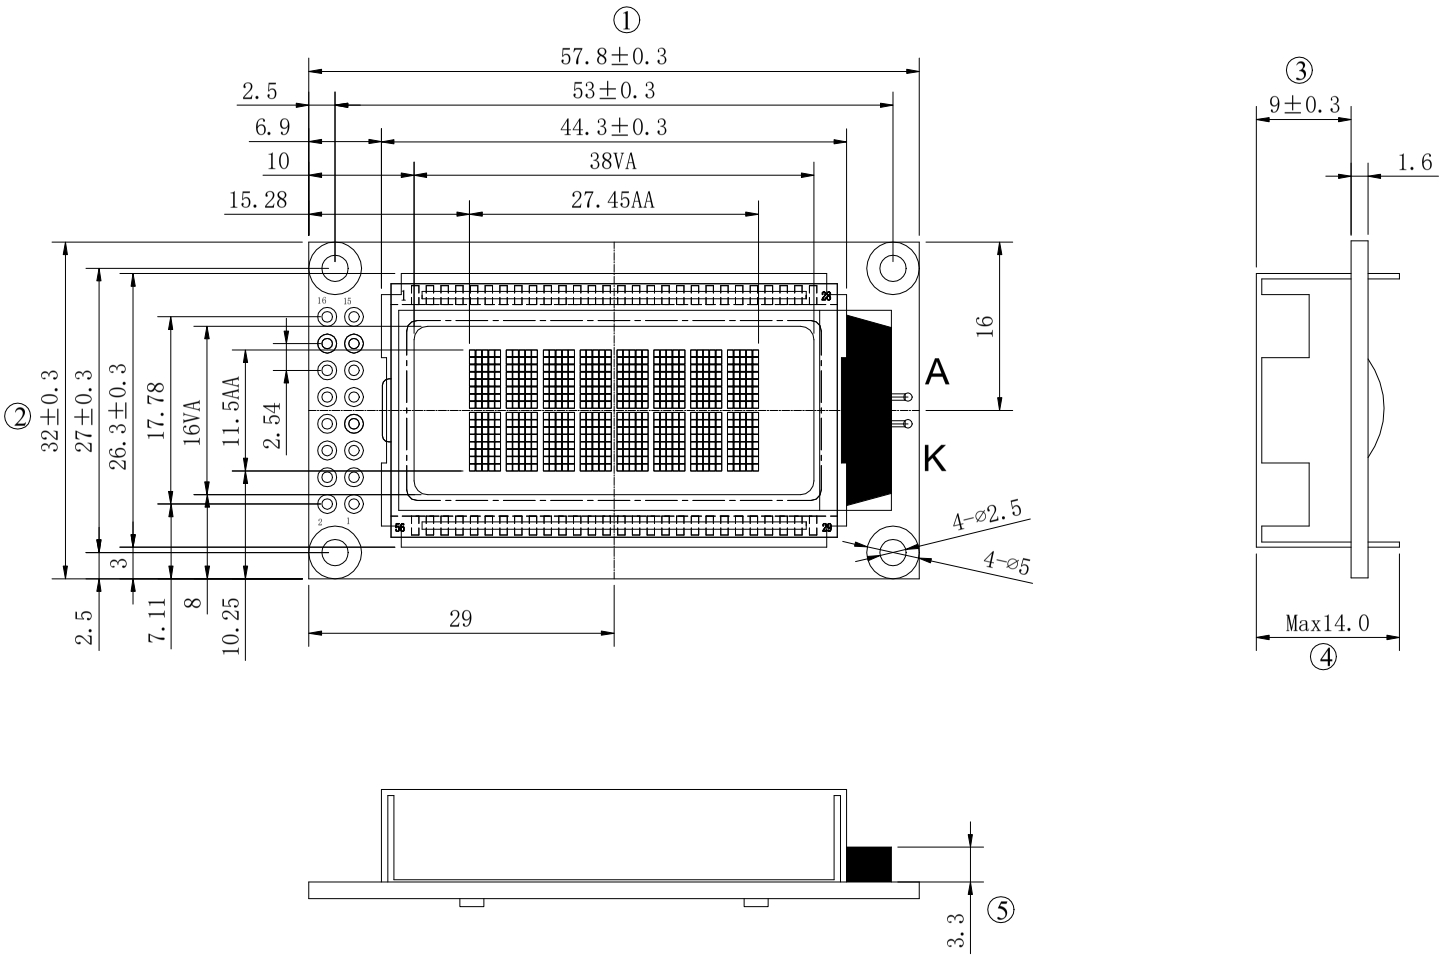

NOTES:

1. GENERAL TOLERANCE: ±0.2
2. ( ) REFERENCE DIMENSION
3. Important dimension: ①~⑤

LCD Type	STN,TRANSFLECTIVE /Positive
Polarizer color	Yellow-Green
Diver method	1/16 DUTY, 1/5BIAS
View Direction	6 o'clock
LCD driver IC	ST7066 OR EQU
Character	English/Japanese
Operaiong Voltage	VOP5.0V/VDD5.0V
Connect types	PIN
BACKLIGHT	Y-G, 5V,20MA
Operating temperature	-20°C~70°C
Storage temperature	-30°C~80°C

版本 (Version)	变更记录(Revise History)	日期(Date)
A0	Initial release	2021.02.22
A1	Increase dimensional tolerance	2021.07.30

设计(DESIGN)	Jxh
审核(CHECKED)	Hcr
批准(APPROVED)	Aron
客户承认 (CUSTOMER APPROVAL)	

TSD™ 一众显示 TEAM SOURCE DISPLAY

TITLE: Character LCM	页面(Page) 1 / 1
	单位(Unit) mm
Drawing No. TSM0802-001A	比例(SCALE) 1 : 1
	角度(Angle)