


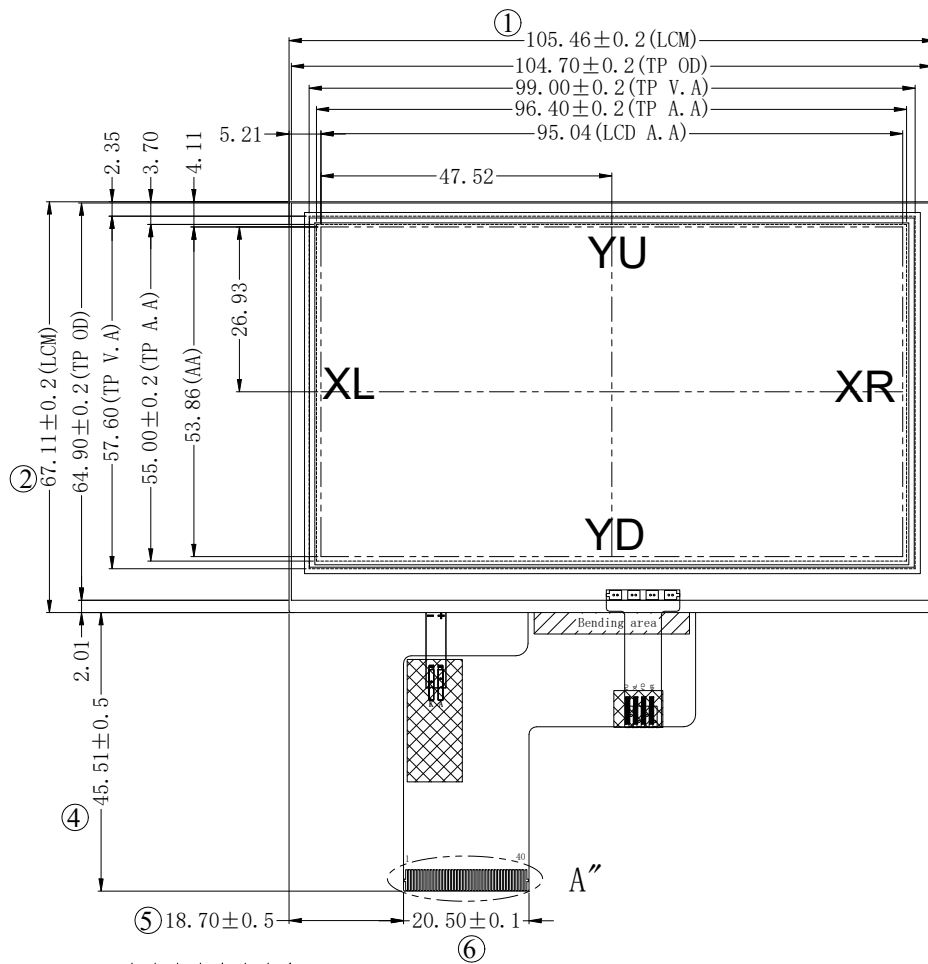

CURRENT : IF=20*2=40mA, 24. 8V (REF.)

LCD Type	4.3"TFT,Transmissive
Resolution	Normally white,TN
View Direction	480(RGB)*272
LCD Driver IC	12 O'CLOCK
Color Depth	ST7282
Interface Types	16.7M
Operating voltage	3.3V
TP/Lens	With RTP
Backlight LEDs	RGB24-bit
Surface luminance	720(min)~800(typ) cd/m ²
Operating temperature	-20 ℃~70 ℃
Storage temperature	-30 ℃~80 ℃
Color chromaticity	[white] x/y:

NOTES:

- GENERAL TOLERANCE: ± 0.2
- () REFERENCE DIMENSION
- Important dimension: ①~⑪

版本 (Version)	变更记录 (Revise History)	日期 (Date)	设计 (DESIGN)	Zahi	 一 众 显 示 TEAM SOURCE DISPLAY		
AO	Initial release	2022.03.10	审核 (CHECKED)	Aron			
			批准 (APPROVED)	Aron	TITLE:	页面 (Page)	1 / 1
					LCM+RTP	单位 (Unit)	mm
			客户承认 (CUSTOMER APPROVAL)		Drawing No.	比例 (SCALE)	1 : 1
					TST043WQIS-88P	角度 (Angle)	

PIN	DESCRIPTION
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU